


Removing and installing rear left lower section of side  
trim,  
refer to 51 43 015

Pry out gas spring strut at top with special tool 00 9 319.



Pry out gas spring strut (1) at bottom with special tool 00 9 319  
and remove from the vehicle.

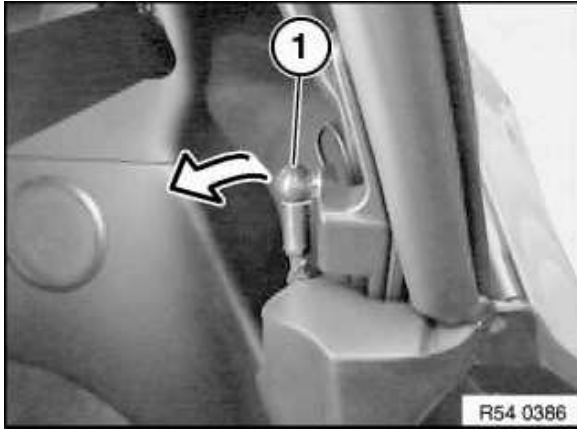